

## Supporting Information

# Addition of $\text{Na}_3\text{PO}_4$ for Enhanced Positive Electrode Performance in All-Solid-State Sodium Batteries

Neung KWON, Kota MOTOHASHI,<sup>§</sup> Chie HOTEHAMA,  
Atsushi SAKUDA,<sup>\*, §</sup> and Akitoshi HAYASHI<sup>§ §</sup>


<sup>a</sup> Department of Applied Chemistry, Graduate School of Engineering, Osaka Metropolitan University, 1-1 Gakuen-cho, Naka-ku, Sakai, Osaka 599-8531, Japan

\*Corresponding author: [saku@omu.ac.jp](mailto:saku@omu.ac.jp)

§ ECSJ Active Member

§ § ECSJ Fellow

(a)

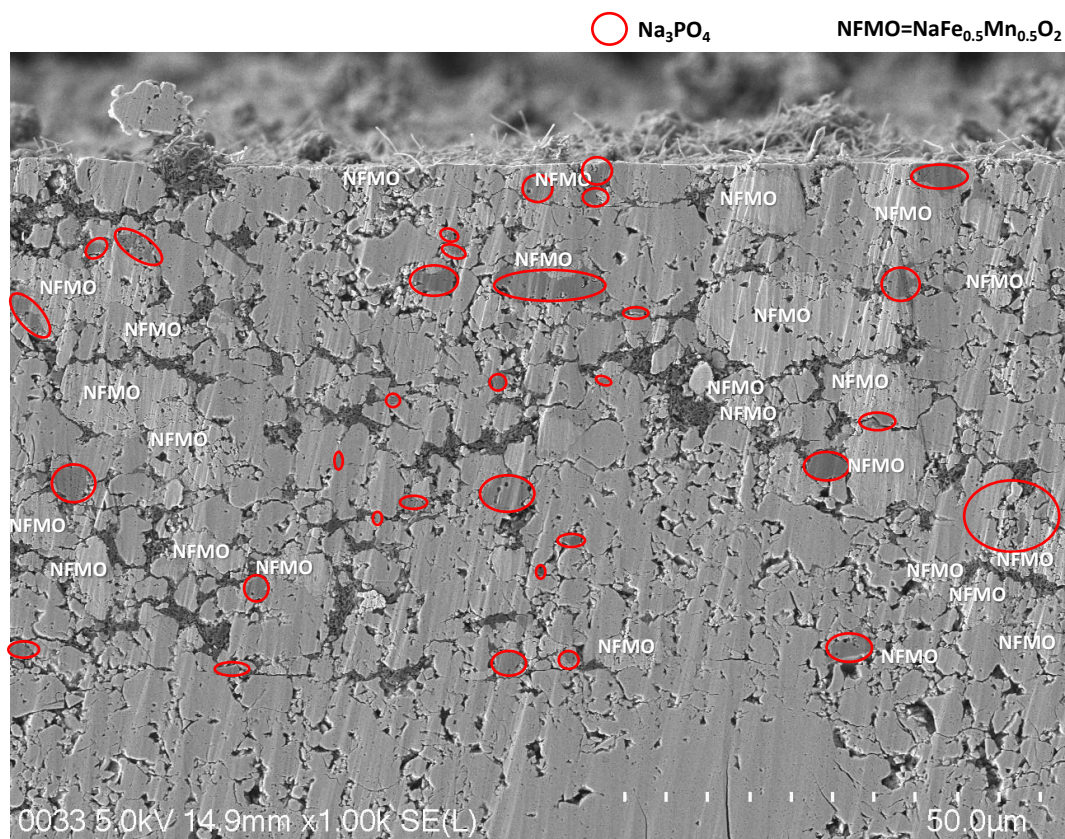

(b)

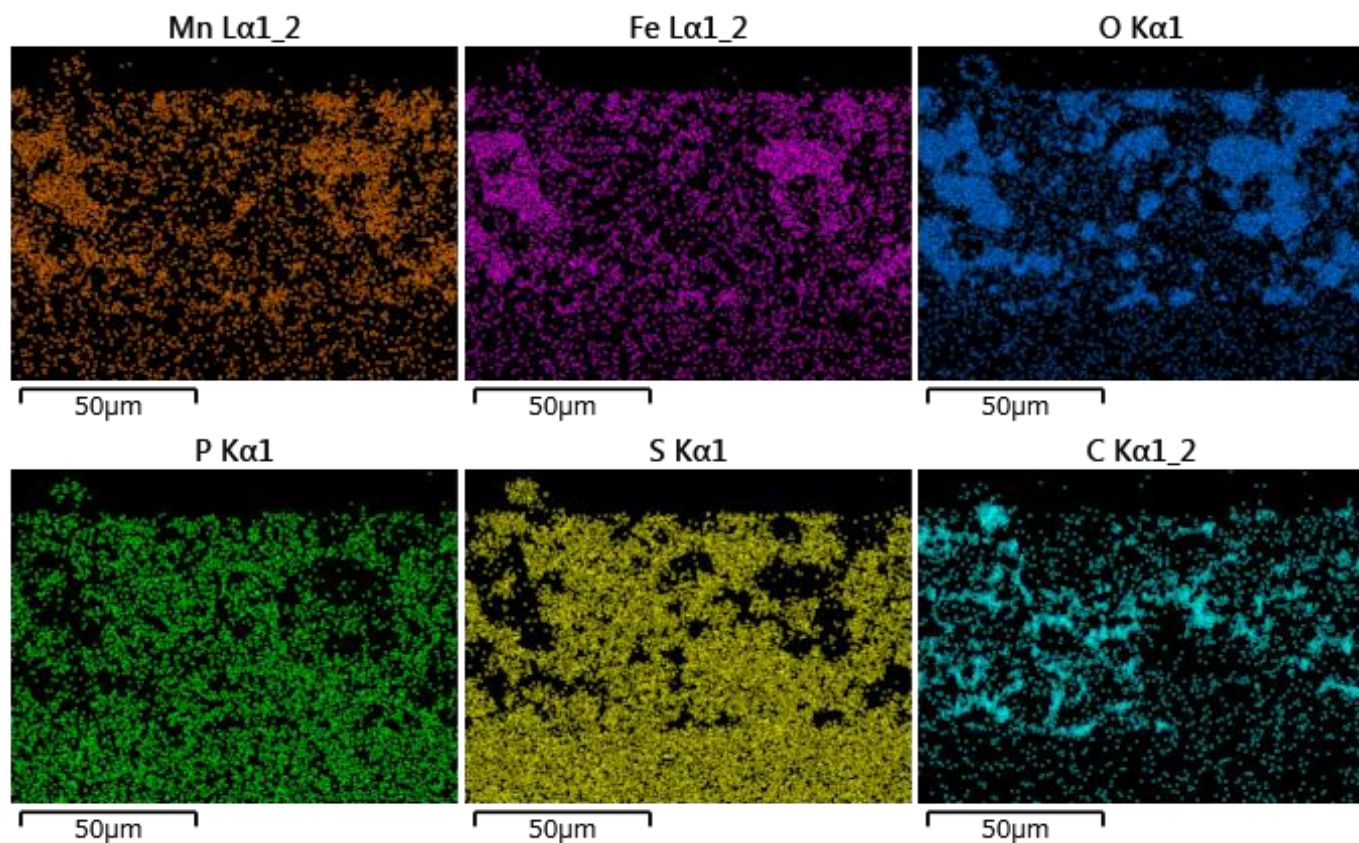


Figure S1 (a) SEM image and (b) EDX elemental mappings for Mn, Fe, O, P, S, and C of the cross-section of the composite electrode consisting of  $\text{NaFe}_{0.5}\text{Mn}_{0.5}\text{O}_2+\text{Na}_3\text{PO}_4$  400 °C,  $\text{Na}_3\text{PS}_4$ , and VGCF.